


Headliner

Replacement

1. Remove:
 - Sun visors and holders.
 - Rearview mirror assembly.
 - Front pillar trim.
 - Rear roof side trim.
 - Roof trim (sunroof opening).
 - Quarter window trim panel (page 14-11).
 - Dome lights.
 - Speaker covers (Section 16)
 - Grab handles, and coat hook.
2. Remove the clips and rear roof trim, then remove the headliner.

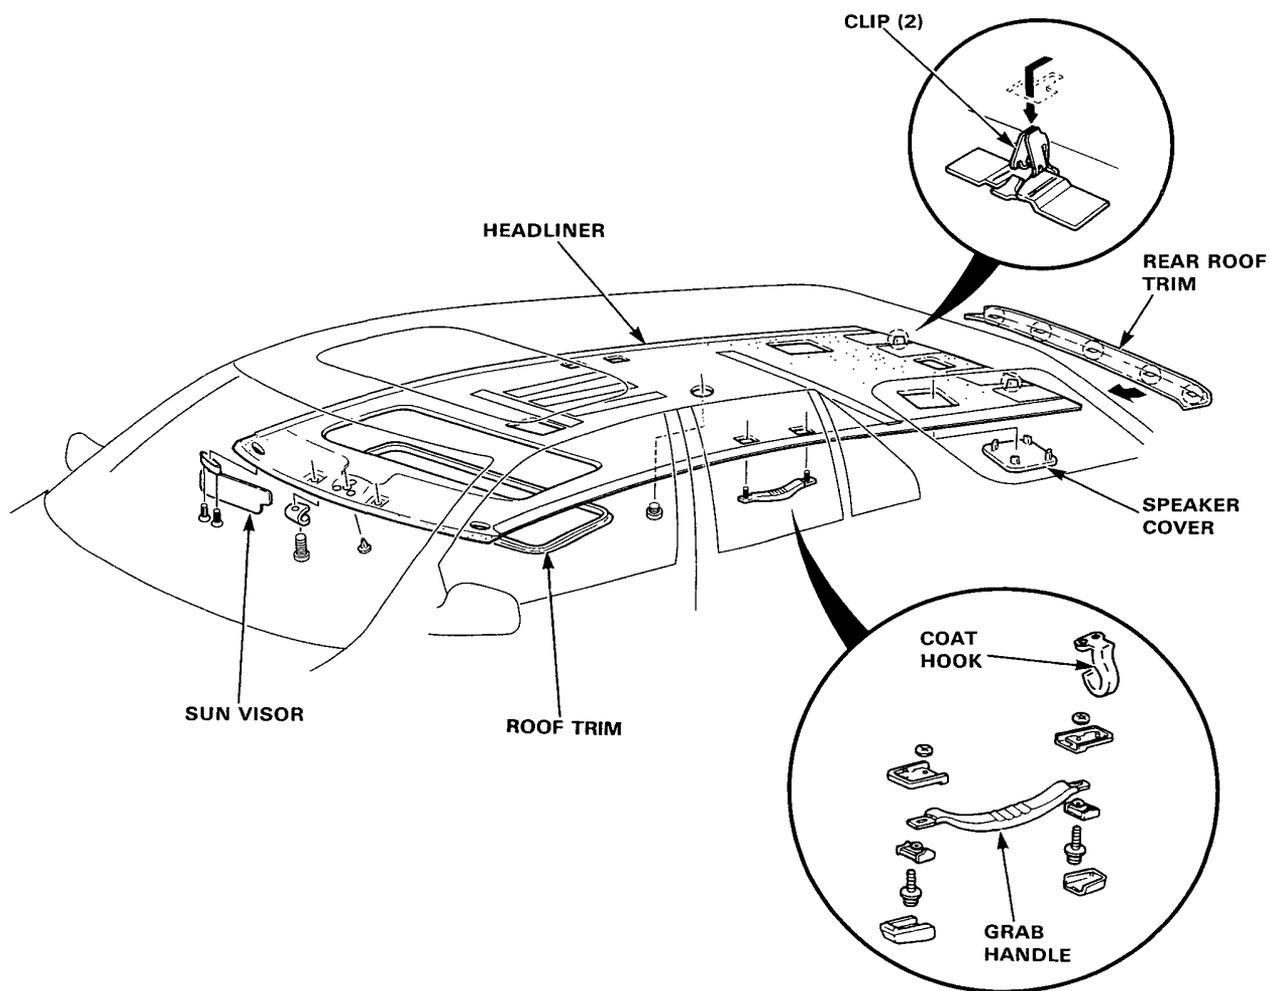

3. Assemble the headliner in the reverse order of disassembly.

NOTE:

- When installing the headliner inside the passenger compartment, be careful not to fold or bend it. Also, be careful not to scratch the body.
- Check that the two sides of the headliner are securely attached to the trim.