




Horns

Component Location Index

CAUTION:


- All SRS electrical wiring harnesses are covered with yellow outer insulation.
- Replace the entire affected SRS harness assembly if it has an open circuit or damaged wiring.
- Before disconnecting the SRS wire harness, install the short connector on the airbag.

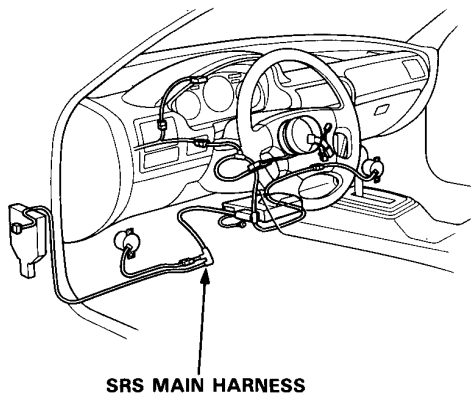


NOTE: RHD type is symmetrical to LHD type.

HORN SWITCHES

Test, pages 16-61 and 62.

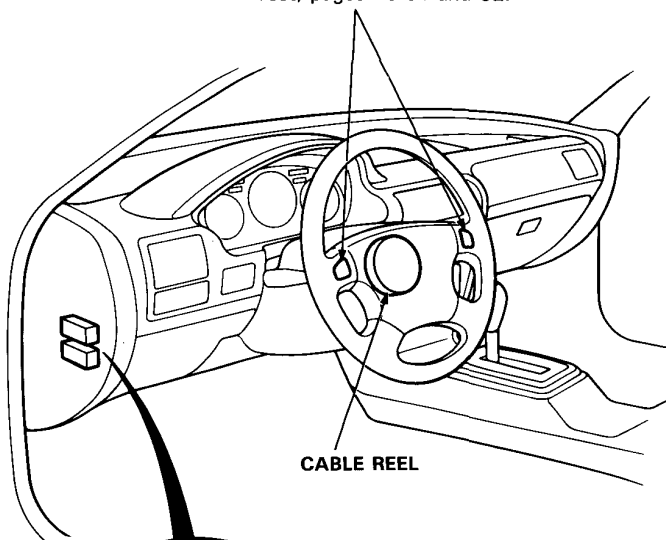

CABLE REEL



HORN RELAY

Test, page 16-63