


# High Mount Brake Light

## Replacement

1. Remove the 2 screw covers and screws, then remove the high mount brake light on the rear shelf.
2. Disconnect the 2-P connector from the light assembly.

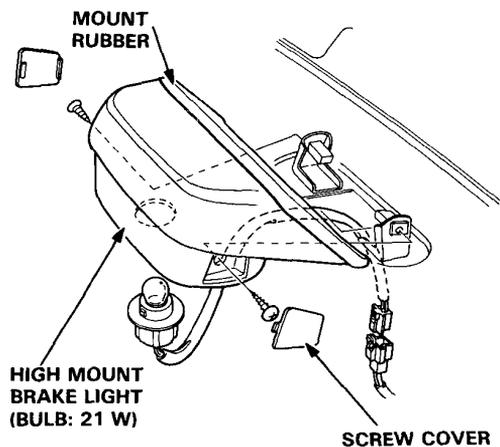

3. Turn the socket 45° counterclockwise to remove the bulb.
4. Install the high mount brake light in the reverse order of removal, and clean the rear window glass before installing.

**CAUTION:** When installing the high mount brake light, make sure the mount rubber is sealed evenly to the rear window glass.