


Diagram

NOTE:

- Apply the designated thickness over surfaces including gaps and edges.
- Avoid spraying agents on following parts:
Window glass, lights, grille, exhaust parts, tires, bumper and lower skirt.
- Wipe up spilled agents at once from rubber and plastic parts.


Anti-rust Agents:

- Use RUSTOP, DEOX #100, WAXOYL or equivalents for protecting inner surfaces.
- Use NOX-RUST 409-20S, SOLTON 1000S or equivalents for protecting outer surfaces.

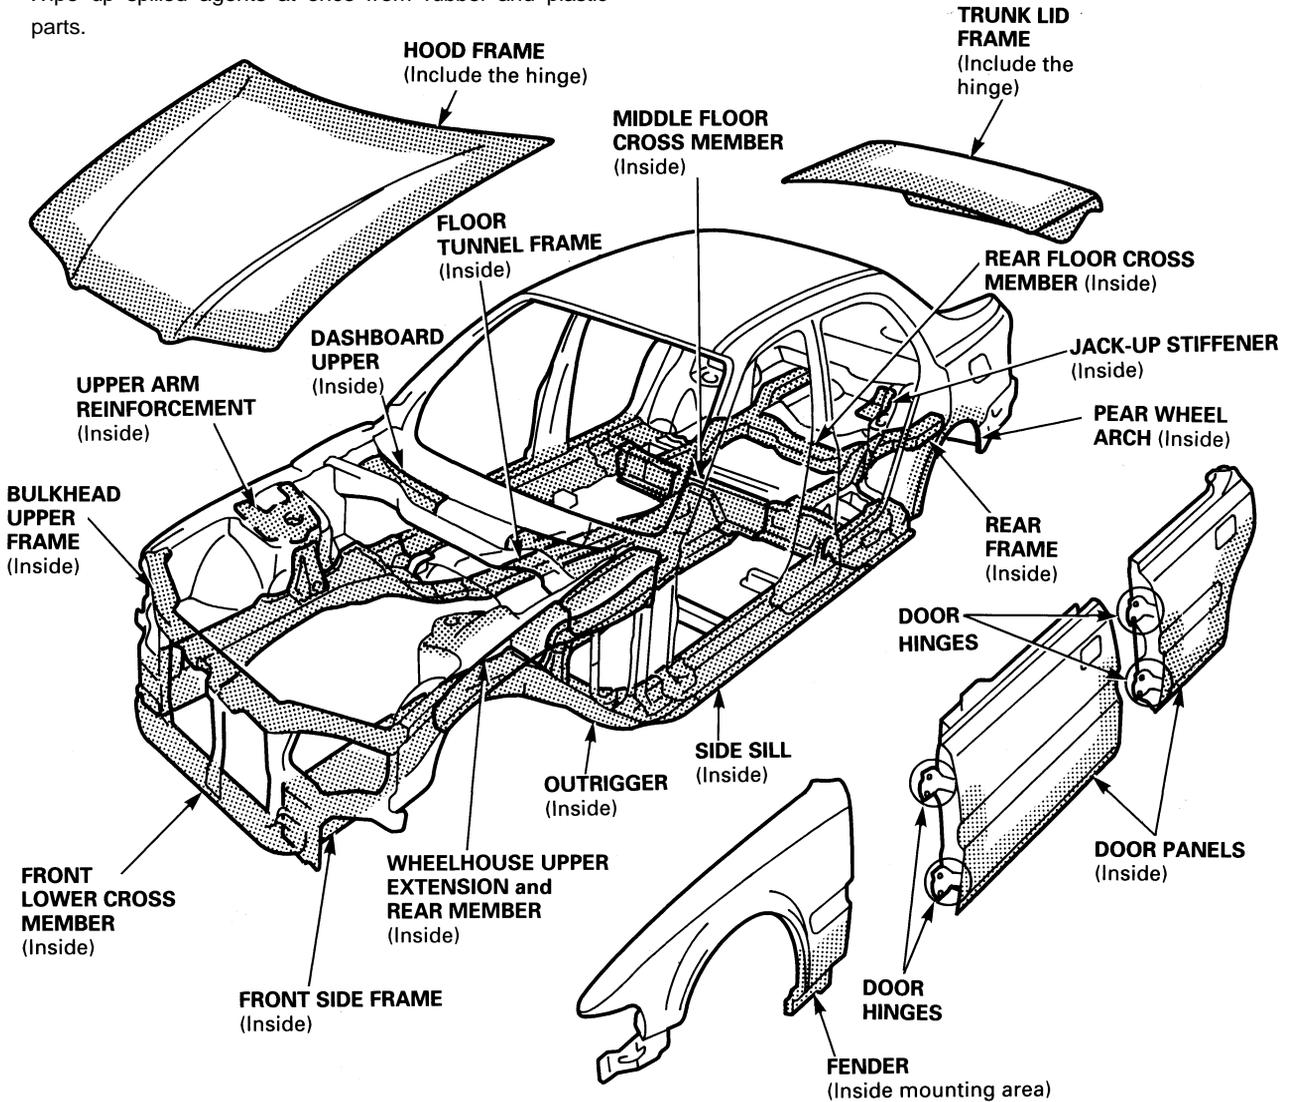

<Whole underside of floor>

NOTE: Apply the agent to the shaded areas only. Do not apply it to the exhaust system and heated oxygen sensors.

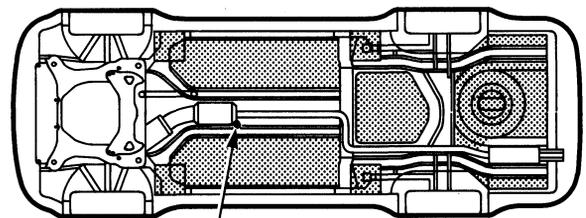

SECONDARY HEATED OXYGEN SENSOR